

INFORMACIÓN TÉCNICA


ONE

VERTICAL

Modelo	Código	EAN	Potencia (W)	Tensión (V)	Peso (Kg)	Consumo mantenimiento 65° kWh/24h	Tiempo de calentamiento (65 °C, Δt=50 °C)	Tomas	ERP	Perf.
ONE 30	931174	3410539311749	1200	230	12	0,63	1h 19 min	1/2"	C	S
ONE 50	941326	3410539413269	1500	230	15	0,95	2h 04 min	1/2"	C	M
ONE 80	951320	3410539513204	1500	230	21	1,2	3h 15 min	1/2"	C	M
ONE 100	961324	3410539613249	1500	230	24	1,83	4h 11 min	1/2"	C	L
ONE 150	971204	3410539712041	2200	230	35	1,17	4h 21 min	3/4"	C	M

MEDIDAS

Modelo	Dimensiones (mm)						
	A	B	C	D	E	F	G
ONE 30	448	433	248	451	158	300	240
ONE 50	612	433	382	451	158	300	240
ONE 80	811	433	592	451	158	300	240
ONE 100	1013	433	742	451	158	300	240
ONE 150	1256	505	1050	529	175	440	440

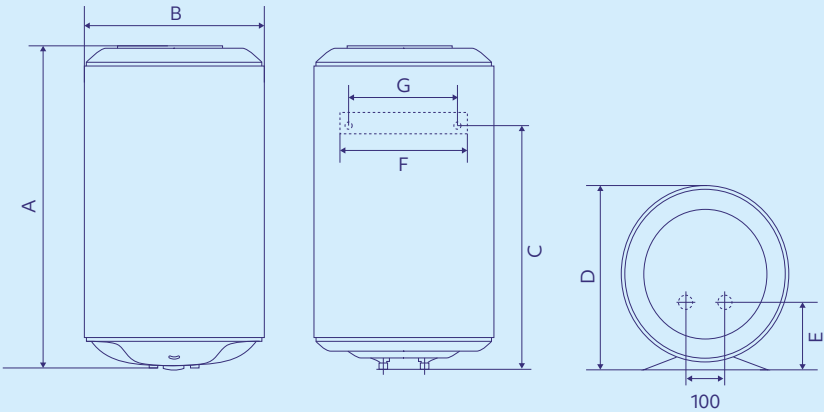

MINI

VERTICAL

Modelo	Código	EAN	Potencia (W)	Tensión (V)	Peso (Kg)	Consumo mantenimiento 65° kWh/24h	Tiempo de calentamiento (65 °C, Δt=50 °C)	Tomas	ERP	Perf.
MINI 15	921355	3410539213555	1500	230	8	0,5	35 min	1/2"	A	XXS
MINI 30	931154	3410539311541	1500	230	11,8	0,7	70 min	1/2"	C	S

MEDIDAS

Modelo	Dimensiones (mm)				
	A	B	C	D	F
MINI 15	387	360	321	100	100
MINI 30	467	440	388	111	100

