


Φ 300

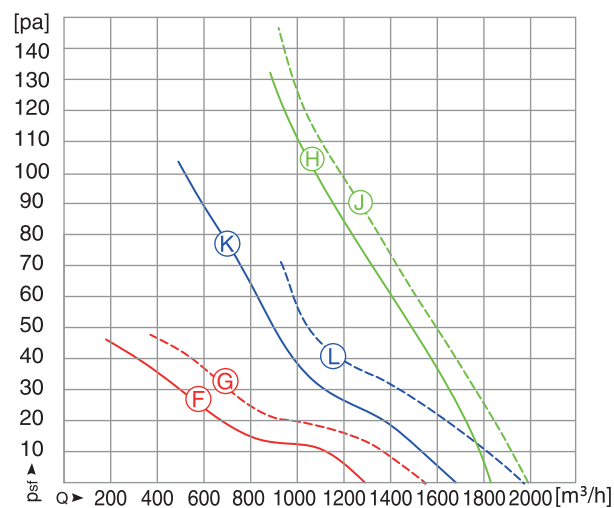

型号 MODEL	电压 UAC	频率 f	电容器 C	曲线 CURVE	输入功率 P1	转速 n	电流 I	静压 p _{sf}	环境温度 Temp.	静压效率 η _{sf}	能效值 EFF. Grade	噪声 Noise	净重 N.W.	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	p _a	℃	%	N	dB/(A)	kg	
YDWF68L35P2-□-300	1~220	50	5	Ⓐ	159	2429	0.75	69	-40~+70	14.91	26.2	70	3	
		60		Ⓑ	212	2388	0.98	60	-40~+65	10.06	20.6	73	3	
YDWF68L35P4-□-300	1~220	50	3	Ⓒ	89	1354	0.41	34	-40~+75	-	-	59	3	
YDWF68L35P4-□-300	1~220	50	2	Ⓓ	95	1347	0.47	60	-40~+75	-	-	58	3	
		60		Ⓔ	95	1626	0.44	40	-40~+80	-	-	62	3	
YDWF68L35P6-□-300	1~220	50	2	Ⓕ	53	886	0.24	26	-40~+80	-	-	55	3	
		60		Ⓖ	66	1007	0.30	32	-40~+80	-	-	56	3	
YSWF68L35P2-□-300	3~380	50	—	Ⓗ	169	2384	0.32	104	-40~+75	18.32	29.4	70	3	
		60		Ⓙ	196	2610	0.33	91	-40~+80	16.41	27.1	73	3	
YSWF68L35P4-□-300	3~380	50	—	Ⓚ	108	1345	0.22	76	-40~+85	-	-	58	3	
		60		Ⓛ	106	1596	0.23	40	-40~+85	-	-	62	3	