



AC AXIAL FAN



Φ350

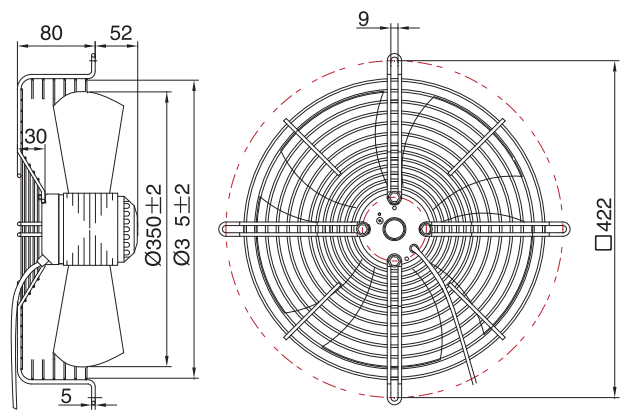

422N

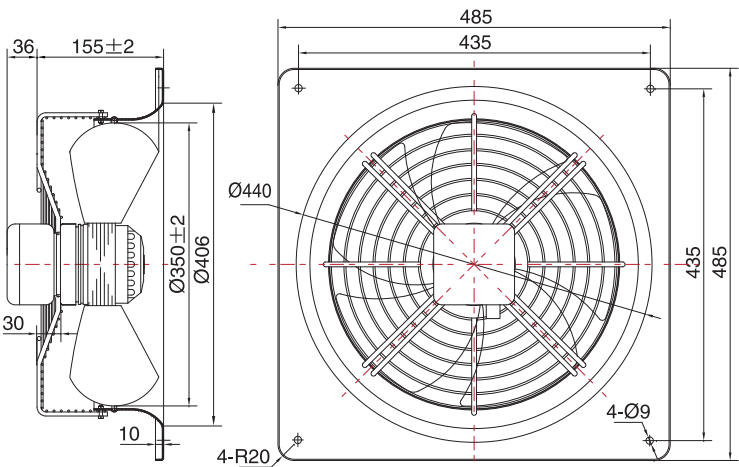

435H

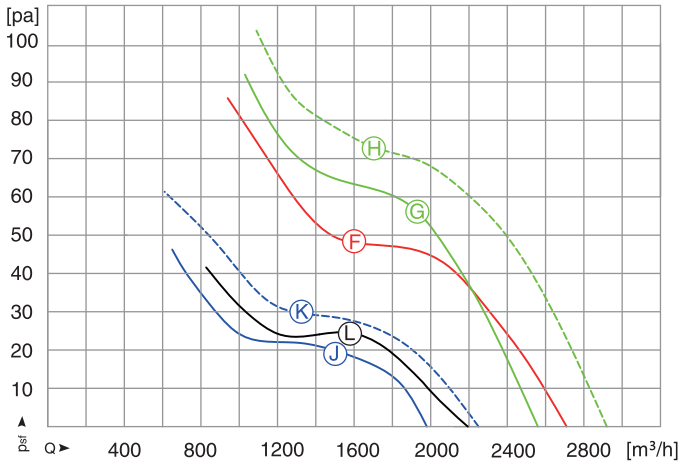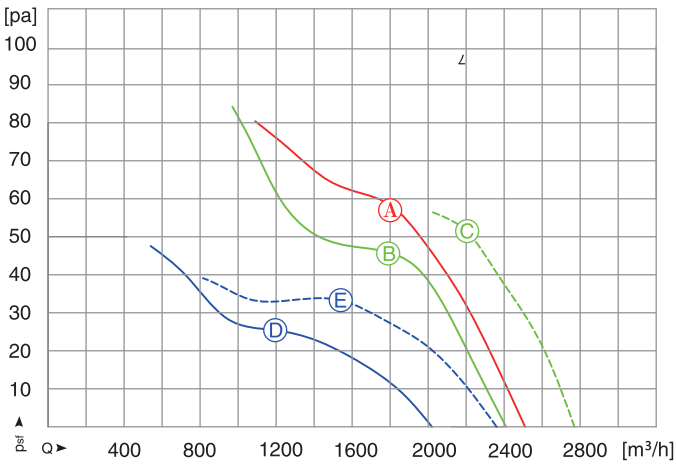

型号 MODEL	电压 UAC	频率 f	电容器 C	曲线 CURVE	输入功率 P1	转速 n	电流 I	静压 p _{sf}	环境温度 Temp.	静压效率 η _{sf}	能效值 EFF. Grade	噪声 Noise	净重 N.W.	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	p _a	℃	%	N	dB(A)	kg	
YDWF74L34P4-□-350	1~220	50	4	(A)	142	1371	0.65	58	-40~+75	20.51	32.0	63	5	
YDWF74L34P4-□-350	1~220	50	4	(B)	118	1387	0.56	46	-40~+80	—	—	62	5	
		60		(C)	160	1575	0.73	52	-40~+80	19.63	30.9	66	5	
YDWF74L34P6-□-350	1~220	50	4	(D)	77	903	0.35	26	-40~+80	—	—	56	5	
		60		(E)	99	1018	0.47	33	-40~+80	—	—	57	5	
YSWF74L34P4-□-350	3~380	50	—	(F)	135	1373	0.33	48	-40~+85	21.05	32.7	63	5	
YSWF74L34P4-□-350	3~380	50	—	(G)	142	1365	0.34	55	-40~+85	20.66	32.2	63	5	
		60		(H)	193	1512	0.36	74	-40~+85	21.20	31.9	66	5	
YSWF74L34P6-□-350	3~380	50	—	(J)	92	918	0.26	20	-40~+85	—	—	57	5	
		60		(K)	106	1041	0.24	31	-40~+85	—	—	58	5	
YSWF74L34P6-□-350	3~380	50	—	(L)	90	922	0.25	25	-40~+90	—	—	57	5	