




AC AXIAL FAN

Φ450

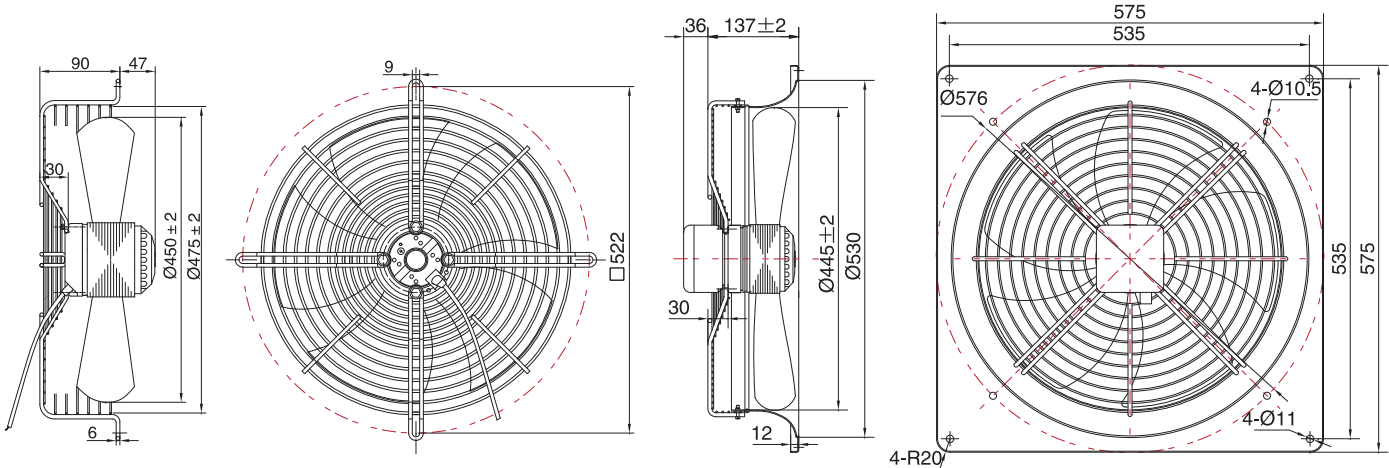

522N

535H

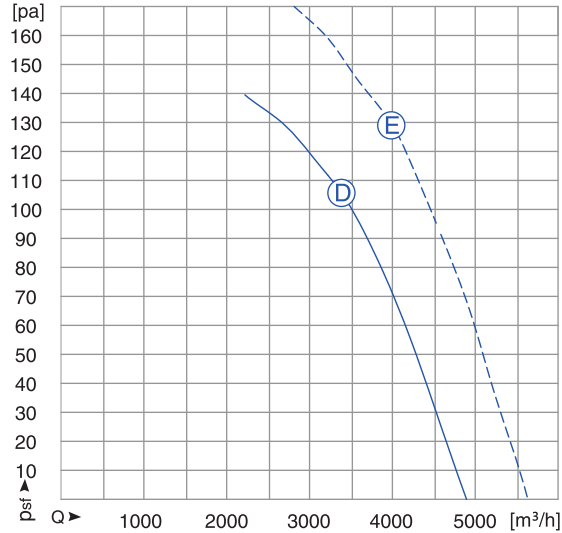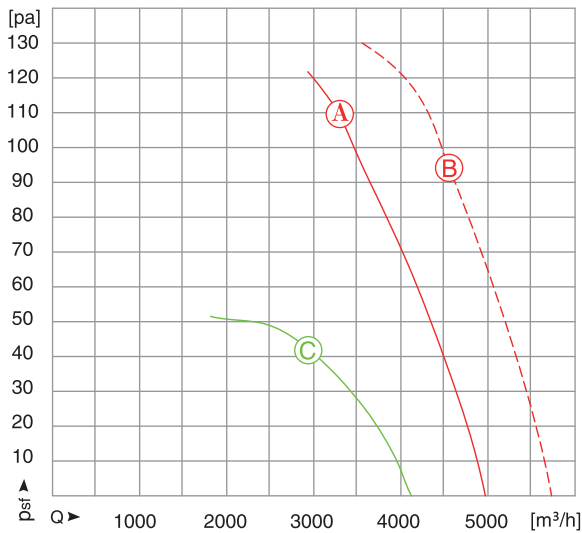

型号 MODEL	电压 UAC	频率 f	电容器 C	曲线 CURVE	输入功率 P1	转速 n	电流 I	静压 p _{sf}	环境温度 Temp.	静压效率 η _{sf}	能效值 EFF. Grade	噪声 Noise	净重 N.W.	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	p _a	℃	%	N	dB(A)	kg	
YDWF102L35P4-□-450	1~220	50	10	(A)	323	1384	1.48	114	-40~+80	31.2	40.5	69	9	4Steel
		60		(B)	423	1602	0.64	94	-40~+80	28.0	36.5	72	9	
YDWF102L35P6-□-450	1~220	50	8	(C)	170	906	0.78	42	-40~+80	20.2	31.3	65	9	
YSWF102L35P4-□-450	3~380	50	—	(D)	319	1397	0.70	106	-40~+90	31.2	40.5	69	9	4Steel
		60		(E)	467	1591	0.82	129	-40~+90	30.7	39.0	72	9	