


MaEr Fan Motor


Professional · Honest · Human Oriented



Ø 400 AC AXIAL FAN 外转子轴流风机

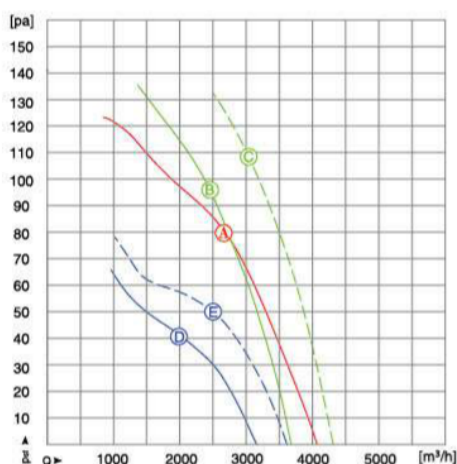

动压 / Dynamic pressure: $p_d = 2.93 \times 10^{-6} \times Q^2 (p_a)$

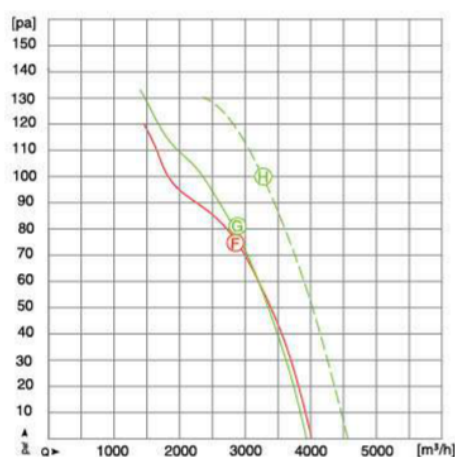

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF74L60P4-□-400	1~220	50	8	(A)	239	1353	1.09	80	-40~+80	25.16	35.3	68	
YDWF74L60P4-□-400	1~220	50	8	(B)	222	1398	1.00	97	-40~+85	29.6	40.1	67	
YDWF74L60P4-□-400	1~220	60	8	(C)	292	1603	1.34	108	-40~+80	31.31	41.1	70	
YDWF74L60P6-□-400	1~220	50	6	(D)	139	907	0.67	42	-40~+80	16.45	28.1	59	
YDWF74L60P6-□-400	1~220	60	6	(E)	167	1045	0.76	50	-40~+75	21.04	32.2	61	
YSWF74L60P4-□-400	3~380	50	—	(F)	227	1382	0.52	76	-40~+80	26.47	36.8	68	
YSWF74L60P4-□-400	3~380	50	—	(G)	223	1391	0.51	79	-40~+80	29.59	40.1	67	
YSWF74L60P4-□-400	3~380	60	—	(H)	307	1575	0.57	101	-40~+75	29.72	39.2	70	

注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.